

THE POND SLOPES, BASIN, AND DAM

SUBGRADES SHALL ACCOUNT FOR

APPLYING 3" OF TOPSOIL BEFORE

APPLYING PERMANENT SEEDING.

- SEE PLAN FOR

INFORMATION

OUTFALL

POND NOTES

TOP SOIL AND ORGANIC MATERIAL SHALL BE STRIPPED FROM THE EMBANKMENT AREA BEFORE CONSTRUCTION BEGINS.

ALL BACKFILL MATERIAL SHALL BE HIGHLY COMPACTABLE CLAY WITH NO ORGANIC MATERIAL AND PLACED IN 4" LIFTS.

6. THE DAM AND BASIN SHALL BE STABILIZED WITH TOPSOIL, SEED, AND MULCH IMMEDIATELY AFTER THE POND CONSTRUCTION IS COMPLETED.

THE BACKFILL AROUND THE PIPE AND RISER TO BE HAND COMPACTED.

4. CONTRACTOR SHALL ENSURE THERE ARE NO VOID SPACES UNDER THE PIPE.

5. OUTLET PIPE SHALL BE PLACED ON A HIGHLY COMPACTED SOIL FOUNDATION.

LOWEST POINT IN

5' X 5' X 4" CONCRETE BASE-

– *INV=1592.2*

STORMWATER POND DETAIL

POND=1592.2

6" DIA PVC


<u>PROFILE</u>

INV=1592.2

POND RISER DETAIL


- INV=1592.2


INV=1592.2

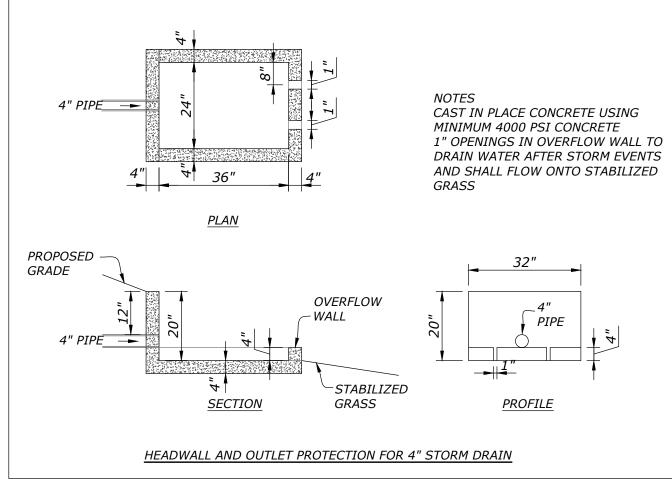

Engineering,

TWood

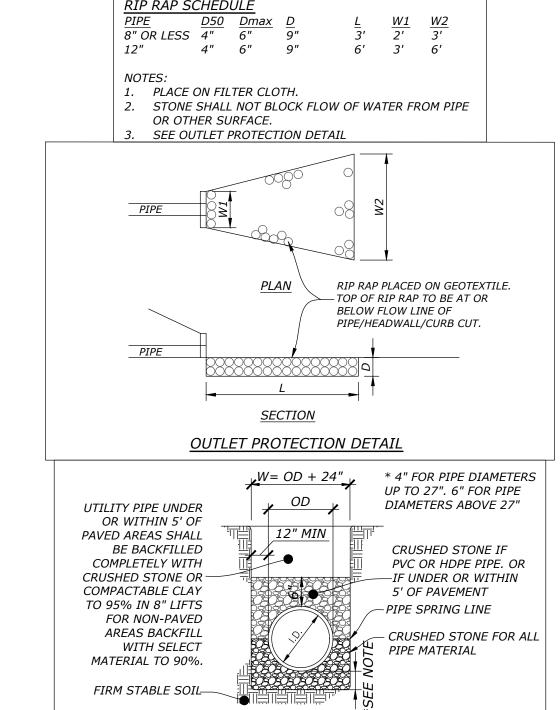


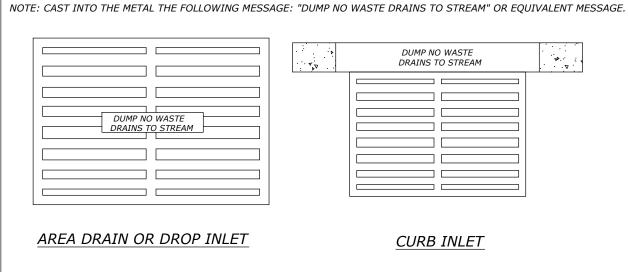

STORM DRAIN STRUCTURE CASTING

PIPE TRENCH AND BACKFILL

STORM STRUCTURE NOTE SEE UTILITY SHEET C3 FOR STORM STRUCTURE DETAILS

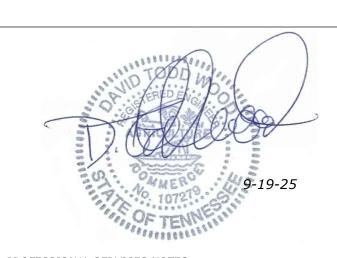

DTWOOD ENGINEERING, INC. ONLY PROVIDES PROFESSIONAL ENGINEERING SERVICES AND DOES NOT PROVIDE SURVEYING SERVICES INCLUDING BOUNDARY

SURVEYS OR PLATS. ANY BOUNDARY SURVEY SHOWN ON THIS PLAN WITH PROPERTY LINES AND METES AND BOUNDS DESCRIPTION IS BY OTHERS AND WE TAKE NO RESPONSIBILITY FOR ITS ACCURACY. ANY TOPOGRAPHIC INFORMATION SHOWN ON THIS PLAN

AVAILABLE PUBLIC DATA.

DATE: 9-19-25

TORMWAT


GRADING A

WAS PROVIDED BY A LICENSED SURVEYOR AND/OR

CONTACT TENNESSEE ONE CALL AT 811 AT LEAST 3 DAYS BEFORE STARTING ANY EARTHWORK OR CONSTRUCTION FOR LOCATION OF EXISTING

EXISTING UNDERGROUND UTILITIES

UNDERGROUND UTILITIES.

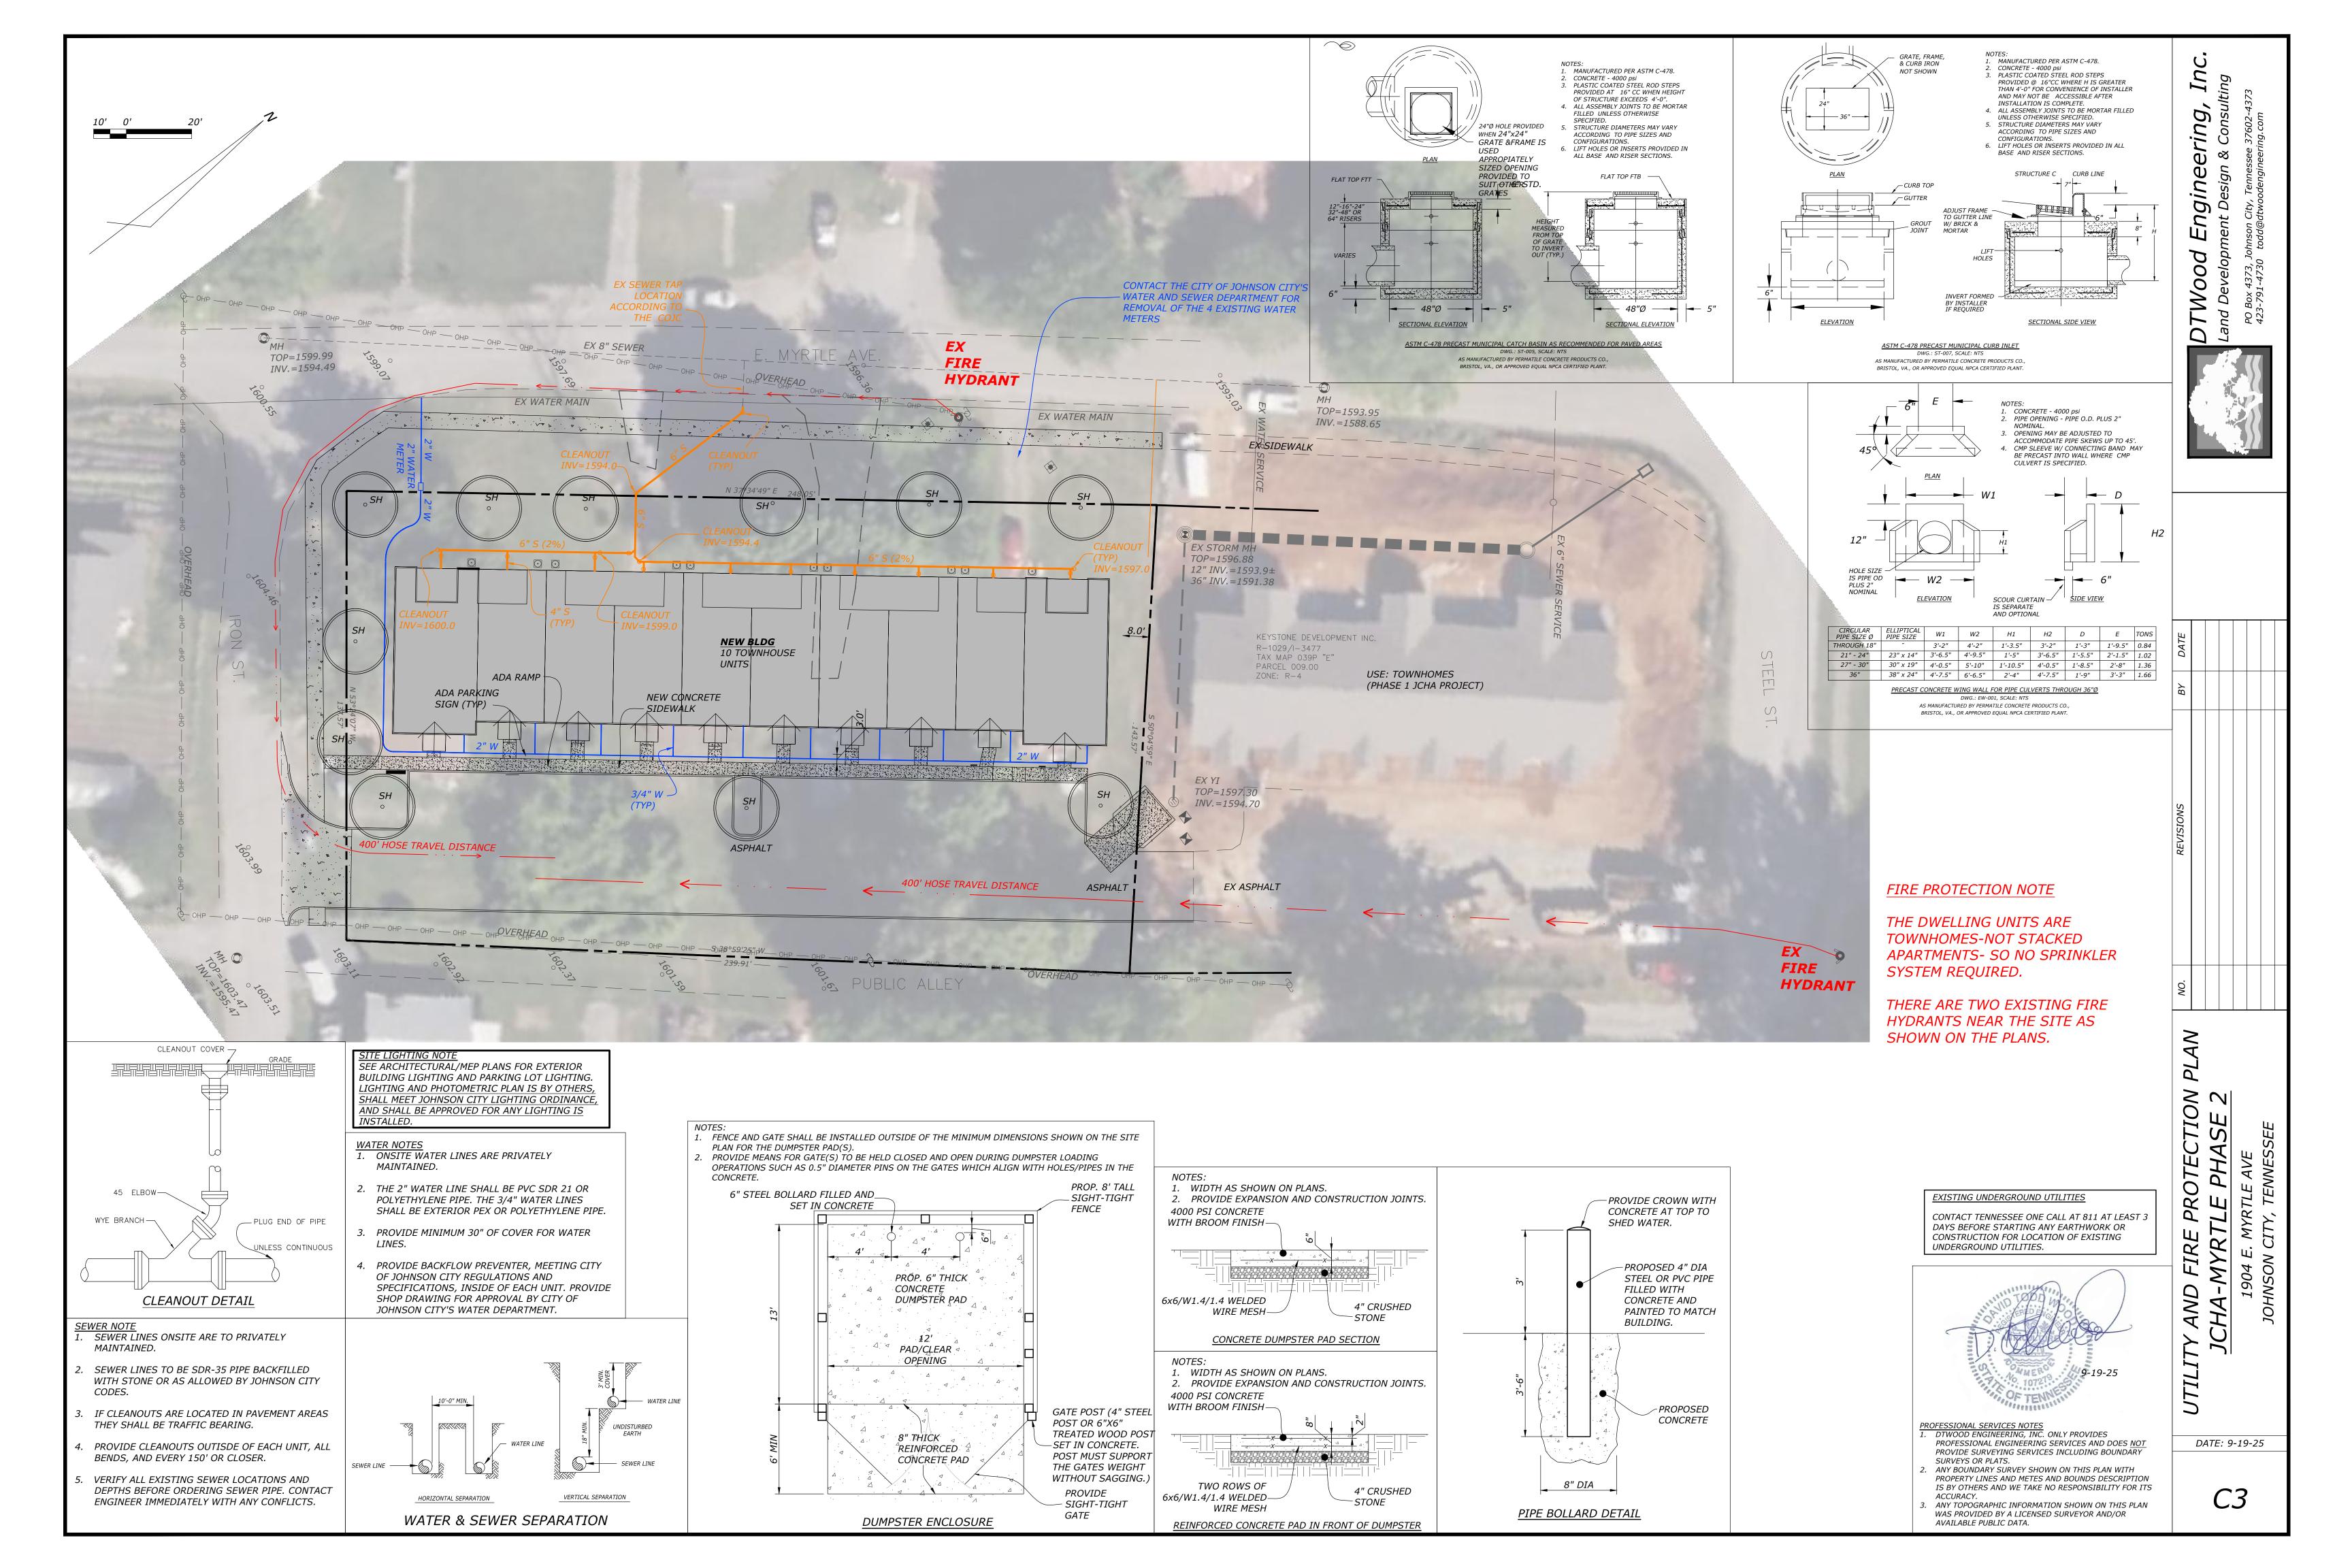

PERSPECTIVE VIEW TOP VIEW

JOINING TWO ADJACENT SILT FENCES

1/4" OPENING WIRE

-MINERAL AGGREGATE

STEEL POST (1.25

LBS/FOOT) (TYP.)

-MINERAL AGGREGATE

MESH

(SIZE 57)

MAX. 4'

FILTERED

SECTION A-A

<u>HARDWARE CLOTH AND GRAVEL INLET PROTECTION</u>

FLOW FROM ALL SIDES)

WATER

2' MIN.

(SEE NOTE BELOW)

minimum will be required.

WATERWAY, LAKE, OR OTHER STORMWATER CONVEYANCE.

<u>Construction Specification</u>
Length - minimum of 50'
Width 20'

turning radius. Maximum side slope of the stone is 3:1.

PROVIDE 100 SQUARE FEET (10'X10', 20'X5', ETC.) X 3' DEEP PIT FOR TRUCKS, INCLUDING CONCRETE TRUCKS, TO WASH INTO. LOCATE THE PIT NEAR THE CONSTRUCTION EXIT IN SUCH A MANNER THAT THE WASH RUNOFF FROM THE TRUCKS WILL DISCHARGE INTO THE PIT. ONCE THE PIT HAS LOST 50% OF ITS STORAGE CAPACITY, REMOVE THE ACCUMULATED SEDIMENT, CONCRETE, ETC. AND DISPOSE OF IN

ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS. THE REMOVED ACCUMULATED MATERIAL SHALL <u>NOT</u> BE DISCHARGED OR DEPOSITED IN A STORM DRAIN SYSTEM, DITCH, STREAM,

. Width - 20' minimum, should be flared at the existing road to provide a

R. Geotextile fabric shall be placed over the existing ground prior to placing

. Surface Water - all surface water flowing to or diverted toward construction

at a high spot and has no drainage to convey a pipe will not be necessary.

Pipe should be sized according to the amount of runoff to be conveyed. A 6"

. Location - A stabilized construction exit shall be located at every point where

construction traffic enters or leaves a construction site. Vehicles leaving the

site must travel over the entire length of the stabilized construction exit.

entrances shall be piped through the entrance, maintaining positive drainage.

Pipe installed through the stabilized construction entrance shall be protected

with a mountable berm with 5:1 slopes and a minimum of 6" of stone over the

pipe. Pipe has to be sized according to the drainage. When the SCE is located

Fence posts shall be 2.25" (nominal) \times 2.25" (nominal) square cut and be of sound quality hardwood or use steel posts will be standard T or U section weighing not less than 1.25 Geotextile shall be fastened securely to each fence post with 5 - 17 ga. wire staples (3 in top 8") for wood or 5 wire or plastic zip ties (50# min. tensile strength and 3 in top 8") for

4. Silt Fence shall be inspected before and after each rainfall event and maintained when

bulges occur or when sediment accumulation reached 50% of the fabric height.

steel posts and shall meet the following requirements warp 120 lbs/in (min.), fill 100 lbs/in Bursting Strength 200 lbs/sq in (min.) 4 gpm/sq. ft (min) Where ends of geotextile fabric come together, they shall be overlapped, folded and stapled to prevent sediment bypass per detail above or overlapped a minimum of 4'.

- PERMANENTLY STABILIZE WITHIN 7 DAYS THOSE AREAS THAT GRADING ACTIVITY HAS
- ONCE ALL DISTURBED AREAS ARE STABILIZED WITH IMPERVIOUS AREA, A THICK STAND OF GRASS, OR OTHER VEGETATION, PERFORM FOLLOWING:
- REMOVE CHECK DAMS AND ACCUMULATED SEDIMENT FROM THE POND AND THEN STABILIZE ANY REMAINING DISTURBED AREAS.
- 6.2. REMOVE EROSION AND SEDIMENT CONTROL DEVICES.

CL. 1 RIP RAP (2"-15" STONE) AT 2:1 SLOPE ON GEOTEXTILE AND KEYED 6" INTO THE GROUND

CHECK DAM

REMOVE ACCUMULATED SEDIMENT FROM STONE RINGS, SILT FENCE, AND SEDIMENT BASIN BEFORE IT REACHES 50% OF THEIR

2. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO PREVENT SEDIMENT AND CONSTRUCTION RELATED DEBRIS FROM ENTERING A PUBLIC STREET. IT IS THE CONTRACTOR'S RESPONSIBILITY TO REMOVE ANY SEDIMENT AND/OR DEBRIS THAT ENTERS A PUBLIC STREET AT THE END OF EACH DAY.


EXISTING UNDERGROUND UTILITIES

CONTACT TENNESSEE ONE CALL AT 811 AT LEAST 3 DAYS BEFORE STARTING ANY EARTHWORK OR CONSTRUCTION FOR LOCATION OF EXISTING UNDERGROUND UTILITIES.

1. Construction vehicles shall clean mud from their tires and body on-site so that the sediment will flow to the wash pit near the construction exit and/or the sediment control devices. Any sediment that ends up in the street or other places offsite shall be cleaned up with a shovel and broom or other means before the next rainfall but shall not be washed away using water. The cleaned up sediment shall be placed back onsite or taken to another site with an approved 2. Vehicles and equipment shall be fueled onsite near the construction exit in a designated containment area. Clean up any fuel spill immediately. Contaminated soils will be placed on

stormwater. All fuel tanks shall be stored in the containment area. All oil, other vehicle fluids, hazardous material cleanup tools as necessary shall be available for immediate use if an onsite spill occurs. If a spill of hazardous materials occurs, the spill shall be contained immediately and then completely cleaned up. If the spill has entered a water source, sinkhole, storm drain,

0



- 6. The washing of paint tools or other hazardous material equipment must be performed and disposed of in accordance with all State and Federal regulations. The cleaning residue from such equipment is hazardous and can not be discharged onto the ground or into a sediment basin, trap, pond, storm drain, ditch, stream, other stormwater conveyance, or to waters of the State including both surface and groundwater and shall be disposed of in accordance with
- 7. Litter, construction materials, construction debris, construction chemicals, and other hazardous materials exposed to storm water shall be picked up prior to anticipated storm events or before being carried off of the site by wind (e.g., forecasted by local weather reports), or otherwise prevented from becoming a pollutant source for storm water discharges. Litter, construction materials, construction debris, construction chemicals, and other hazardous materials shall not be allowed to enter a sediment basin, trap, pond, storm drain, ditch, stream, other stormwater conveyance, or to waters of the State. This can be accomplished by screening outfalls, daily pickup or cleanup, or other methods.
- 8. After their use, materials used for erosion prevention and sediment control should be removed or otherwise prevented from becoming a pollutant source for storm water discharges. 9. Contractor is responsible for litter control and cleanup.
- 10. Sediment controls shall be provided for any water distribution or waste disposal system onsite including sanitary sewer or septic systems.

STABILIZATION NOTE STABILIZE POND SLOPES, SWALES, AND ALL SLOPES STEEPER THAN 3:1 WITH EROSION CONTROL MATTING (NORTH AMERICAN GREEN S75 FOR SLOPES AND SC150 FOR SWALES OR EQUIVALENT) AND PERMANENT SEEDING. INSTALL PER MANUFACTURER'S SPECIFICATIONS.

TEMPORARY SEED MIX

- APPLY EVENLY DISTRIBUTED MIX OF ANNUAL RYE, KOREAN LESPEDEZA, AND SUMMER OATS AT 50#/ACRE (OR AS DIRECTED BY SEED
- SPECIALIST): 2. IF SEEDED FROM NOVEMBER THROUGH FEBRUARY, APPLY CEREAL RYE AT 50#/ACRE. IN MARCH, APPLY THE ABOVE MIX IF THE AREA WILL CONTINUE TO BE TEMPORARILY UNDISTURBED.

1. APPLY 100% KY31 TALL FESCUE AT 150#/ACRE (OR AS DIRECTED BY SEED SPECIALIST):

2. IF SEEDED FROM NOVEMBER THROUGH FEBRUARY, ADD CEREAL RYE AT 50#/AC TO THE ABOVE MIX.

Adequate drainage, erosion and sediment control measures, best management practices, and/or other water quality management facilities shall be provided and maintained at all times during construction. Damages to adjacent property and/or the construction site caused by the contractor's or property owner's failure to provide and maintain adequate drainage and erosion/sediment control for the construction area shall be the responsibility of the property owner and/or contractor.

PROFESSIONAL ENGINEERING SERVICES AND DOES NOT PROVIDE SURVEYING SERVICES INCLUDING BOUNDARY

SURVEYS OR PLATS. . ANY BOUNDARY SURVEY SHOWN ON THIS PLAN WITH PROPERTY LINES AND METES AND BOUNDS DESCRIPTION IS BY OTHERS AND WE TAKE NO RESPONSIBILITY FOR ITS ACCURACY. ANY TOPOGRAPHIC INFORMATION SHOWN ON THIS PLAN

AVAILABLE PUBLIC DATA.

WAS PROVIDED BY A LICENSED SURVEYOR AND/OR

DATE: 9-19-25